SBI SWEDEN **Fact Sheet**

SB International AB
info@sbisweden.com
www.sbisweden.com
+46 36 37 50 30

Tractor

A bestseller with an authentic design that fits any setup, powered by a 12 V system.

- **Age range:** 3 – 11 years.
- **Maximum weight admitted:** 50 kg / 110 ibs.
- **Speed max:** 4 km/h / 2,5 mph.
- **Frame:** Reinforced steel tubing, powder coated.
- **Body:** RTM fiberglass.
- **Bumpers:** Molded vulcanized rubber with steel reinforcement.
- **Transmission:** Chain.
- **Wheels:** Rubber tire with inner tube. (10” and 17”).

CUSTOMIZE YOUR VEHICLES:

DECOR:
Custom decors on request

BIM

COLOR:
- Red
- Orange
- Green
- Blue

Custom colors on request

OPTIONS:
- Sound
- Light
- Seat belt
- Remote on/off
- Coin/Token /Card

DESIGN YOUR TRACK LAYOUT:

We assist in creating your perfect space-efficient layout



RECOMMENDED MINIMUM AREA:
15 m² / 161 sq ft per vehicle.

CAPACITY / THRC (example with 10 vehicles)
Up to 120 rides per hour based on a 5 min ride cycle.
10 vehicles minimum 150 m² / 1610 sq ft.

®SB INTERNATIONAL AB 2026

Specifications, designs, and colors are subject to change without prior notice. All images are for illustrative purposes only.

SB International AB
info@sbisweden.com
www.sbisweden.com
+46 36 37 50 30

Tractor

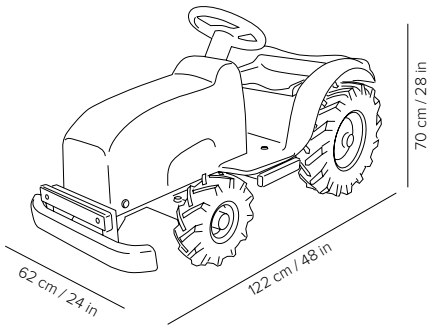

Bumper height. 11 cm / 4,5 in



TECHNICAL SPECIFICATIONS

A bestseller with an authentic design that fits any setup, powered by a 12 V system.

FEATURES

Capacity: 1 child.
Age range: 3 to 11 years old.
Maximum weight driver: 50 kg / 110 lb.
Maximum speed: 4 km/h / 2,5 mph.
Operating time: 8 – 10 hours.
Vehicle weight: Approx. 70 kg / 154 lb. (incl. battery).
Turning radius: Outer Ø 295 cm / 116 in.
Bumper height: 11 cm / 4.5 in. (The bumper height refers to the distance from the ground to the center of the bumper).
Length: 122 cm / 48 in.
Width: 60 cm / 24 in.
Height: 65 cm / 26 in.

Frame: Reinforced steel tubing, powder coated.
Body: RTM fiberglass.
Body Colors: Red, Orange, Green, Blue.
Bumpers: Molded vulcanized rubber with steel reinforcement.
Transmission: Chain.
Wheels: Rubber tire with inner tube. (10” 17”). Ball Bearings in each rim.

Electrical system: 12 V. Available with 24 V system as option.
Motor: Electric motor with planetary gear.
Motor fuse: Automatic 12 V 10/12 A, 5 – 10 sec o, 10-20 sec reset.
Battery: Dry fit traction block (12 V – 38 Ah).
Battery weight: Approx. 10 kg / 22 lb.
Battery charger: 3-step charger (12 V – 4 A), fully automatic.
Accelerator: Green pedal with microswitch.
Brake: Automatic.

Shipping parameters:

1 unit: Approx. 122 × 80 × 85 cm / 48 × 31 × 33 in. 90 kg / 198 lb.
2 units: Approx. 122 × 80 × 155 cm / 48 × 31 × 61 in. 160 kg / 353 lb.
3 units: Approx. 122 × 80 × 225 cm / 48 × 31 × 89 in. 230 kg / 507 lb.

NOTE

To emphasize that the tractors meet high safety standards, all products are clearly labeled with the requirements users should be aware of to ensure compliance with these standards.

SET–UP AND OPTIONS

PRODUCT	INCLUDED	OPTIONAL
Free Drive Setup	•	
Regular Gel Battery	•	
Battery Charger	•	
Decor: Headlights. Front, Tail-lights.	•	
Lithium Battery System		•
Seat Belt		•
Coin / Token Operation		•
Card Reader		•
Remote Control On/Off		•
LED Lights & Sounds		•
Custom body colors		•
Custom decor		•
Full Customization		•

AREA (Recommended minimum area)

15 m^2 / 161 sq ft. per vehicle.
(10 vehicles minimum area required 200 m^2 / 2150 sq ft).

CAPACITY / THRC (Example with 10 tractors)

Up to 120 rides per hour based on a 5 min ride cycle.

CERTIFICATES

Quality: CE marking. ISO 9001 & ISO 14001.

3D / BIM

Revit and DWG models are available.

www.sbisweden.com

Scan to visit the productpage:

®SB INTERNATIONAL AB 2026

Specifications, designs, and colors are subject to change without prior notice. All images are for illustrative purposes only.